


WHEELJOCKEY™


Using the Wheel Jockey™

For use on road motorcycles up to 750 lbs.
Not for use on off-road tires.

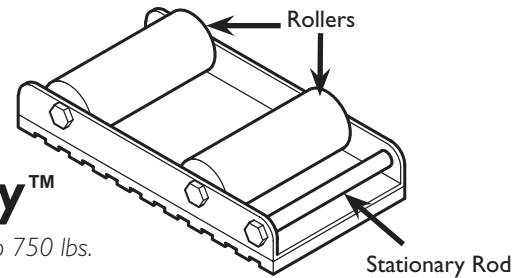

Begin with the motorcycle on level ground. **Be sure the side stand is in the "down" position and the bike is leaning on the side stand.**


With the bike still on the side stand, position the Wheel Jockey 2" in front of the rear (or front) wheel, with the smaller, stationary rod end pointing toward the wheel.

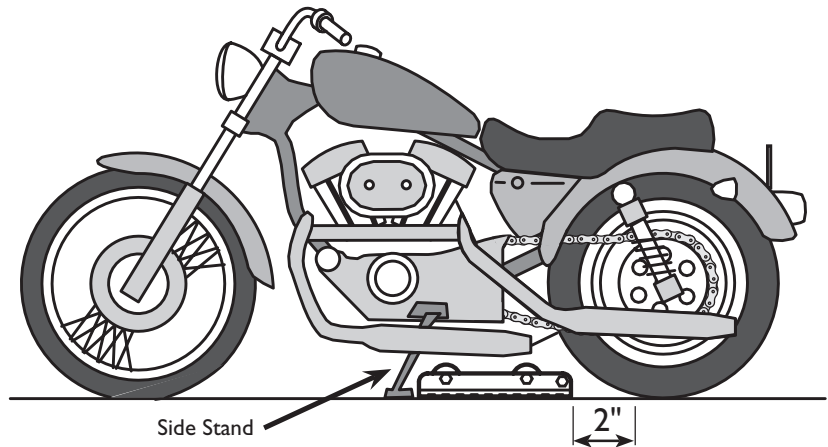

Bring the bike upright and slowly roll the bike forward until the wheel is positioned in the center of the two rollers.


Carefully lean the bike back onto the side stand and make sure the wheel is centered over the rollers and the bike is stable.

You may now clean the wheel and perform chain maintenance. To gain access to the entire chain and wheel, slowly rotate the wheel on the rollers.

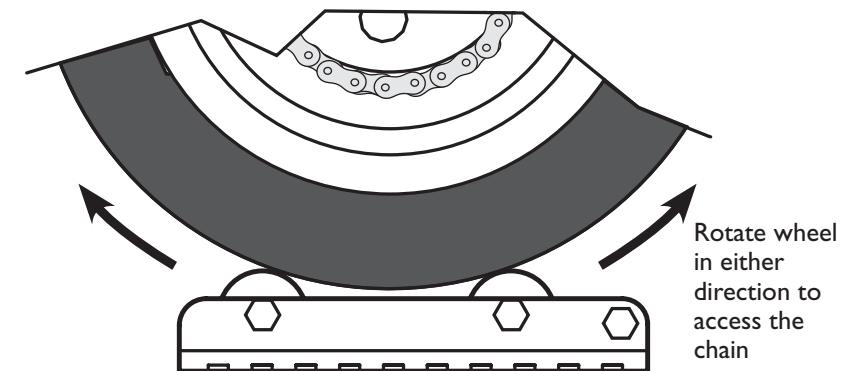

When cleaning and maintenance is complete, once again stand the bike vertically and roll it forward off the Wheel Jockey.

Return bike to rest on the side stand.

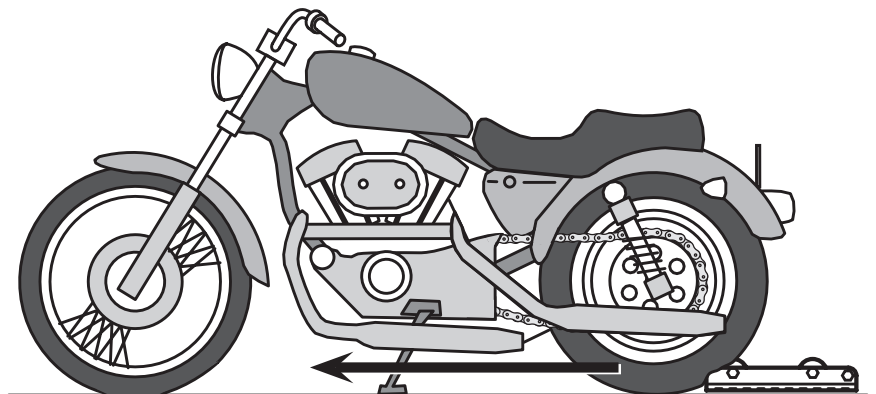

Patent Pending

Rules of the Road When Using Wheel Jockey™

- Always exercise caution and common sense
- Make sure the motorcycle engine is switched off at all times
- Always try and keep one hand on the bike when rotating the wheel
- When possible, enlist the aid of a friend to help further stabilize the bike

© 2009

www.wheeljockey.com

(704) 256-4049